

BASIC ENGINEATOR SPECIFICATIONS

AIR INLET SYSTEM

Air Inlet Connection – One 16" (406 mm) round tube.

Air Cleaner – One dry panel type with mechanical gauge for remote mounting (shipped loose).

BARRING DEVICE – Manual.

BASE – Engine and generator are mounted and aligned on a structural steel fabricated base designed for mounting on an isolated concrete pad and suitable for lifting. Base must be fully grouted in place according to Waukesha recommendations.

CAMSHAFT – Consists of individual segments, one per cylinder, bolted together.

CONNECTING RODS – Low alloy, forged, fully machined.

CRANKCASE – Single piece, stress relieved, gray iron casting. Main bearing caps are retained with vertical studs and lateral tie bolts.

CRANKSHAFT – Low alloy, forged, fully machined, counterweighted with nine main bearing journals. The crankshaft is flanged for full power transmission from each end. Bearings are heavy duty, replaceable, precision aluminum type.

CRANKCASE PRESSURE RELIEF DOORS – Seven mounted.

CRANKCASE VENT CONNECTION – Single 3" (76.2 mm) round tube.

NOTE: A crankcase ventilation blower is required. Order code 1135 or 1135A.

CYLINDER HEAD – Eight interchangeable, bore-cooled with two hard-faced intake and two hard-faced exhaust valves per head. Includes hardened stainless steel intake and exhaust valve seats and prechamber fuel control valves.

CYLINDER LINERS – Removable wet type with intermediate jacket water guide.

ENGINE INSTRUMENT CONNECTIONS – Thermocouples, K-type, for jacket water temperature, lube oil temperature, individual cylinder exhaust temperatures and pre and post turbocharger temperatures wired to a common junction box. Pressure taps piped to a common bulkhead for intake manifold pressure, lube oil pressure, prechamber fuel pressure, main chamber fuel pressure and jacket water pressure. Instruments and panel are by others. Recommend optional Model 4000 Remote Engine Instrument Panel (reference Engomatic® controls).

ENGINE PROTECTION SHUTDOWN CONTACTS – For high water temperature, low oil pressure, high intake manifold temperature (standard engine mounted thermocouple with one thermocouple relay – shipped loose), overspeed (electronic speed switch – shipped loose), and engine detonation sensing, alarm and shutdown, (see separate description of Detonation Sensing Module). Two engine mounted emergency shutdown/starter lockout palm buttons are supplied, one on either side of the engine. Use all of the above in conjunction with a DC control panel for unit shutdown, (reference Engomatic controls).

NOTE: DC control panel is not supplied as standard.

EXHAUST SYSTEM

Exhaust Manifold – Eight, water cooled.

Exhaust Outlet – One 16" (406 mm) flanged, vertical outlet.

FLYWHEEL – With 267 tooth ring gear. Machined for direct connected, generator shaft or plate type coupling.

FLYWHEEL GUARD – Fabricated steel guard for protection of the rotating components is mounted to the engine-generator base.

FUEL SYSTEM – Carburetor with precombustion circuit. Single fuel inlet connection, mounted main and prechamber gas supply regulators. Pressure required; 45 – 60 psig (3.1 – 4.1 bar). Shipped loose 24V DC pilot operated main fuel valve. Mounted 24V DC pilot operated prechamber fuel valve. Includes adjustable speed switch for control of prechamber solenoid valve during start cycle.

GENERATOR – Open dripproof, direct connected, fan cooled, 2/3 pitch, A.C. revolving field type, anti-friction grease lubricated bearing(s), with brushless PMG type exciter and damper windings. TIF and deviation factor within NEMA MG-1.32. Voltage 4160/2400, 3 phase, 6-wire, WYE, 60 Hz or 3300/1905, 3 phase, 6-wire, WYE 50 Hz. Other voltages are available, consult factory. Insulation material NEMA Class F. Temperature rise within NEMA (105° C) for continuous power duty. All generators are rated at 0.8 power factor. Includes terminal standoff assembly. Shipped Mounted.

GOVERNOR – Woodward UG actuator, mounted, with 2301D load sharing speed control (shipped loose).

IGNITION SYSTEM – Waukesha Custom Engine Control Ignition Module with flange mounted coils. Ignition system meets Canadian Standards Association Class I, Division 2, Group D hazardous location requirements. Includes fuses for protection against reverse polarity. 24V DC power required.

INTERCOOLER – Air-to-water.

JUNCTION BOXES – Separate AC, DC, and instrument/thermocouple junction boxes for engine wiring and external connections.

LUBRICATION SYSTEM – Gear driven, externally mounted gear type pump with pressure regulator and bypass circuit. Discharge side has flange for connection to remote oil cooler. Includes shell and tube type lube oil cooler sized for connection in series with intercooler. Not mounted. Includes full flow, 45 gallon (170 litre) capacity oil filter. Not mounted. Includes 175° F (79° C) lube oil temperature control valve, mounted on shipped loose oil cooler. Includes full flow filter strainer. Requires single customer lube oil inlet connection. Includes electric motor driven pre/post lube pump, 5 hp 230V AC/3ph/50 – 60 Hz, with motor starter (other voltages can be specified). Not mounted.

NOTE: External control logic is required to start/stop prelude pump.

PAINT – Oilfield orange paint.

PISTON – Single piece, aluminum alloy with integrally cast cooling coils. Four piston rings with the top two compression rings housed in a Ni-resist ring carrier. 9:1 compression ratio.




Waukesha

POWERING PERFORMANCE

8L-AT27GL

ATGL® Series
Gas Engineator®
Generating System
1330 - 1550 kW

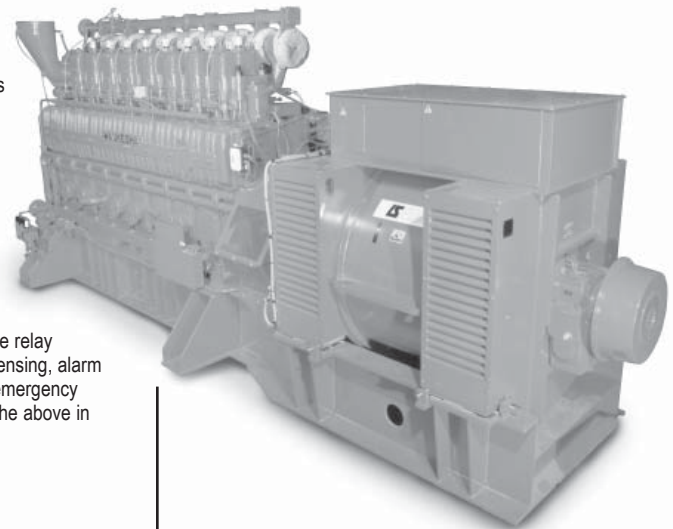

Model 8L-AT27GL Gas Engineator

SPECIFICATIONS

ENGINE	Fuel SLHV
8L-AT27GL,	900 Btu/ft ³
Four Cycle,	(35.3 MJ/m ³)
Overhead Valve	Lube Oil Capacity
Cylinders	168 gal. (635 L)
Inline 8	GENERATOR
Piston Displacement	Power Factor for
8699 cu. in. (143 L)	Ratings
Bore & Stroke	0.8
10.83" x 11.81"	Insulation Material
(275 x 300 mm)	NEMA Class F
Compression Ratio	Temperature Rise
9:1	Within NEMA (105°C)
Jacket Water	Voltage
System Capacity	4160/2400, 3 phase,
80 gal. (303 L)	6 wire, Wye, 60 Hz*
Aux. Water Capacity	3300/1905, 3 phase,
35 gal. (132 L)	6 wire, Wye, 50 Hz*
Starting System	TIF and Deviation Factor
225 psig	Within NEMA, MG 1.22
(15.5 bar) Air	*Additional voltages available.
Fuel Pressure Range	
45-60 psig	
(3.1-4.1 bar)	



STARTING SYSTEM – One TDI 112 turbine pneumatic starter with 24V DC starting valve and strainer. Requires 150 psig (10.3 bar) air/gas supply. Crank termination switch is shipped loose.

NOTE: For starting and/or operation at or below 40 ° F (5 ° C) consult S9064 in the Technical Data Book under "Starting".

TURBOCHARGER – One, water cooled center housing, exhaust driven, with Turbo-charger Control Module (TCM), electronic controlled wastegate and air bypass. 24V DC required.

VIBRATION DAMPER – Enclosed hydroelastic type.

VOLTAGE REGULATOR – SCR static automatic type, providing 1% regulation from no load to full load with automatic subsynchronous speed protection. Single phase sensing. Includes voltage adjustment rheostat. All items are shipped loose.

WATER CIRCULATION SYSTEM

Auxiliary Circuit – Includes gear driven water pump with discharge piped to intercooler. Suction side has single flange for customer connection. Requires single customer outlet connection. Includes auxiliary water temperature control valve, not mounted.

Engine Jacket – Includes gear driven water pump with discharge to engine inlet. Suction side has single flange for customer outlet connection. Requires single customer outlet connection. Includes 180° F (82° C) jacket water temperature control valve, not mounted.

WAUKESHA CUSTOM ENGINE CONTROL DETONATION SENSING MODULE (DSM) – Includes individual cylinder sensors, Detonation Sensing Module, and filter. Device is compatible with Waukesha CEC Ignition Module only. Sensors are mounted and wired to DSM filter. Detonation Sensing Module and filter are mounted. 24V DC power is required. The DSM meets Canadian Standards Association Class I, Division 2, Group D, hazardous location requirements.

WAUKESHA CUSTOM ENGINE CONTROL AIR FUEL MODULE (AFM) – Electronic air fuel ratio control. Includes air fuel module, main fuel gas regulator actuator, intake manifold pressure transducer, exhaust O² sensor assembly, junction box, and wiring harness. All equipment is shipped loose for customer installation. Wiring harness allows connection of all engine mounted components to junction box. The module must be mounted off engine. 24V DC power is required. The AFM meets Canadian Standards Association Class I, Division 2, Group D, hazardous location requirements.

PERFORMANCE DATA: 8L-AT27GL GAS ENGINATOR GENERATING SYSTEM


WATER CONNECTION COOLING Continuous Power*	I.C. WATER TEMP.: 90°F (32°C)		I.C. WATER TEMP.: 130°F (54°C)	
	900 rpm 60 Hz	100 rpm 50 Hz	900 rpm 60 Hz	1000 rpm 50 Hz
KW RATING	1400	1550	1330	1480
Fuel Consumption x 1000 Btu/h (kW)	12983 (3805)	14599 (4278)	12220 (3580)	13910 (4077)
Jacket Water x 1000 Btu/h (kW)	2587 (758)	2838 (832)	2571 (754)	2884 (845)
Intercooler x 1000 Btu/h (kW)	1230 (361)	1399 (410)	960 (281)	1141 (335)
Lube Oil x 1000 Btu/h (kW)	223 (65)	338 (99)	258 (76)	381 (112)
Heat Radiated x 1000 Btu/h (kW)	234 (68)	241 (71)	234 (68)	245 (72)
Exhaust Heat** x 1000 Btu/h (kW)	3899 (1143)	4443 (1302)	3687 (1081)	4250 (1246)
Exhaust Flow lb/h (kg/h)	24210 (10982)	26004 (11795)	22990 (10428)	25132 (11400)
Exhaust Temperature °F (°C)	632 (333)	666 (352)	632 (333)	662 (350)
Induction Air Flow scfm (m ³ /min)	5391 (135)	5791 (162)	5119 (129)	5597 (140)

Typical heat balance data is shown. Consult factory for guaranteed data.

*Continuous Power Rating: The highest electrical power output of the Enginator available for an unlimited number of hours per year, less maintenance. It is permissible to operate the Enginator with up to 10% overload for two hours in each 24 hour period.

Rating Standard: The Waukesha Enginator power rating descriptions are in accordance to ISO 8528, DIN6271 and BS5514. It is also valid for ISO 3046/1-1986 with an engine mechanical efficiency of 90% and auxiliary water temperature T_{cr} (clause 10.0) is limited to ±10° F (5° C).

**Heat rejection based on cooling exhaust gas to 85° F (29° C).

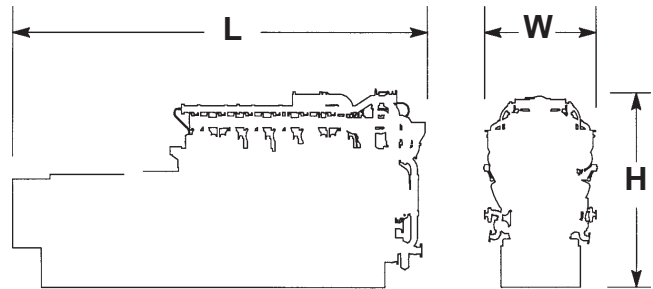

Cooling Equipment	L in (mm)	W in (mm)	H in (mm)	Avg. Wt. lb (kg)
W.C.	296 (7520)	99 (2520)	123 (3130)	70000 (32000)



Waukesha

WAUKESHA ENGINE
 DRESSER, INC.
 1101 West St. Paul Avenue
 Waukesha, WI 53188-4999
 Phone: (262) 547-3311 Fax: (262) 549-2795
 waukeshaengine.dresser.com
 Bulletin 8081 0407

Consult your local Waukesha Distributor for system application assistance. The manufacturer reserves the right to change or modify without notice, the design or equipment specifications as herein set forth without incurring any obligation either with respect to equipment previously sold or in the process of construction except where otherwise specifically guaranteed by the manufacturer.