

TRANSFLUID



# TRANSFLUID

**trasmissioni industriali**



**drive with us**

## **KFBD - SKF**

FLUID COUPLING FOR INTERNAL  
COMBUSTION ENGINES

# FLUID COUPLINGS FOR INTERNAL COMBUSTION ENGINES

## Applying TRANSFLUID Fluid Couplings in your Drive Line

Transfluid Fluid Couplings are used on all types of industrial equipment driven by internal combustion engines up to 2300 kW. By transmitting power through a fluid, they improve overall performance and protect both driving and driven machine.

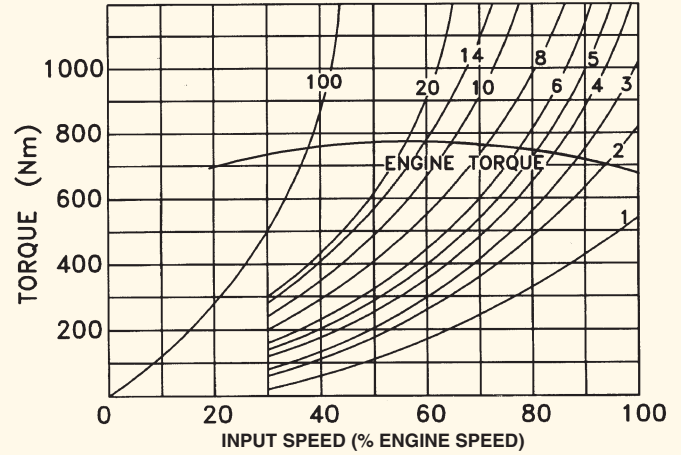


Fig. 1

Figure 1 shows the typical performance available from a Fluid Coupling when used with an internal combustion engine. The curved sloping lines represent the torque capacity of Fluid Coupling for various values of slip and input speeds. The relatively flat curve is the engine torque.


The points at which the curves intersect, indicate per cent of slip in the coupling output. Since slip represents loss of speed between input and output member and since Fluid Coupling transmits torque at a 1:1 ratio, output speed and output power can be readily calculated. Performance characteristics are easily determined by superimposing the engine torque curve on the torque capacity curve of the selected Coupling.

From the performance curve it can be noted that at 100% of governed speed, slip is 1.5%. As the load on the Coupling output member increases, it demands more torque, forcing the engine to decelerate so that it can supply this extra torque. A slower input speed to the Coupling will result in a higher slip. If still greater loads are applied, the Coupling output member will eventually stall with the engine being pull down in speed until its torque curve intersects the 100% slip curve of the Coupling.

Note that 100% slip should not occur until the engine has developed peak torque. This is a highly desirable characteristics, since it permits the engine to deliver maximum torque without stalling and also permits rapid acceleration to normal load speeds. In addition to transmitting power smoothly and without shocks the Coupling has other advantages related to engine operation. Especially important is the fact that the engine can always be started under low load conditions.

Figure 2 shows the fluid couplings power capacity against input engine speed. It is a quick selection chart where slip values are not mentioned. For an application specific calculation ask Transfluid or local distributor.

GENERAL REFERENCE POWER CHART

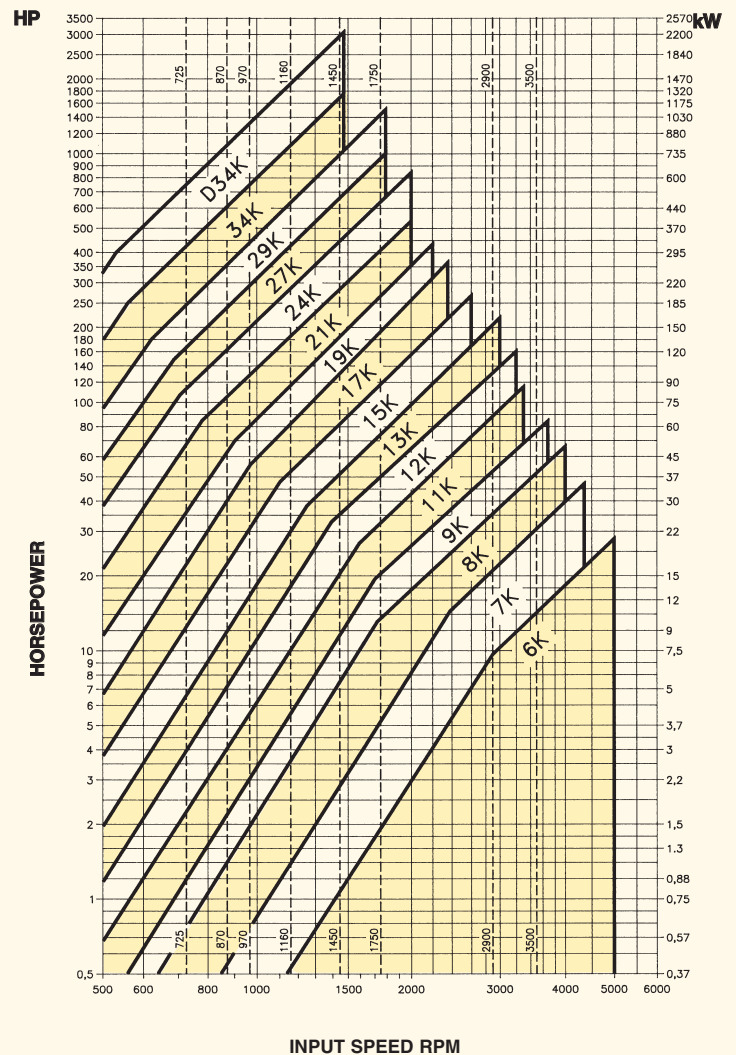

THE CURVES SHOW LIMIT CAPACITY OF COUPLING  
Fig. 2

When you drive through a Transfluid Coupling you profit by these Basic Benefits

1

**Frees engine during heavy starts**

During heavy starts and sudden running load increases, engine stalling is prevented. The Fluid Coupling simply “slips” while the engine smoothly picks up the load.

2

**Provides cushioned drive**

Mechanical connection is eliminated; power and torque are transmitted entirely by the mass and velocity of the fluid. The result is a smooth, sustained flow of power without the shocks and strains which, with mechanical drives, reduce equipment life.

3

**Prevents transmission of shock loads**

Fluid Couplings protect both driving and driven equipment by smoothing out shock loads and preventing them from impacting the drive line.

4

**Assures damping effect**

Torsional vibrations from engine are drastically dampened by Fluid Couplings allowing longer life of entire transmission line.

5

**Transmits full input torque**


The patented Transfluid Circuit design always delivers output torque equal to input torque. The engine can operate at the maximum torque-rpm, even when the driven equipment is stalled.

6


**Improves load distribution on compounded drives**

With Fluid Couplings, engines no longer “fight” each other when a common drive is driven in parallel. Each engine is free to seek its own operating speed, while the Fluid Couplings balance the load requirements at each point of operation.


HF or PTO CLUTCH with KSD

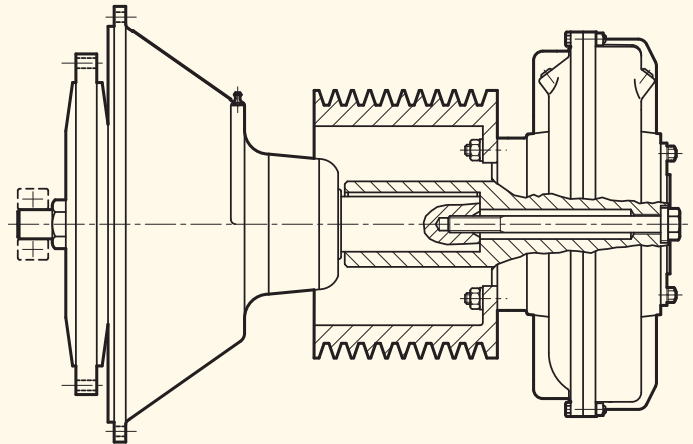

KRU


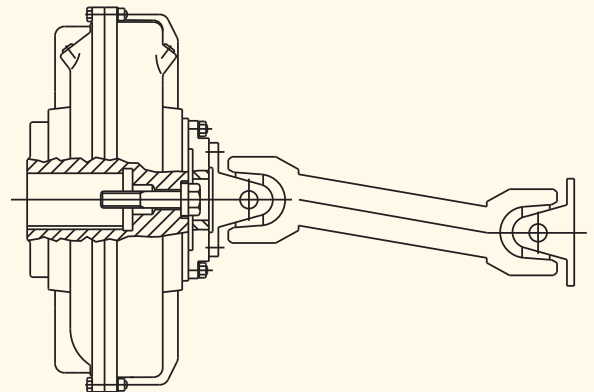


KRBD

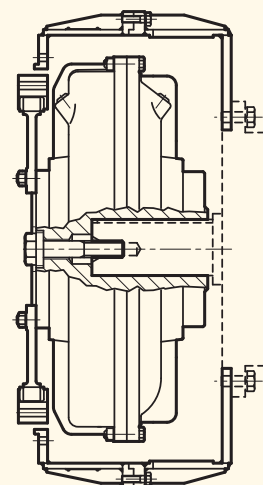

# SKF SERIES OIL TIGHT FLYWHEEL MOUNTED



SKF type installation requires specific design. Please contact our technical department for certified prints and instructions.

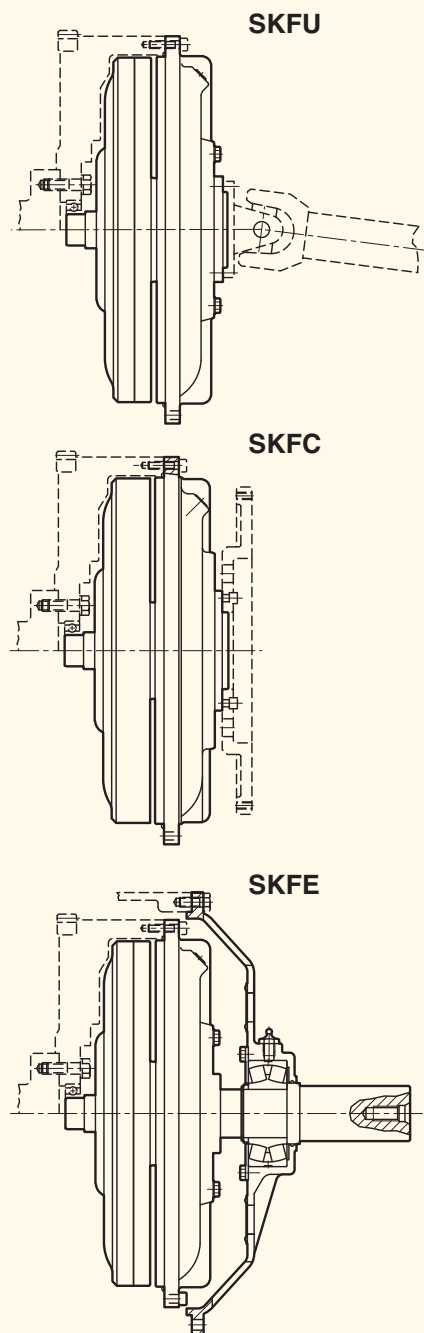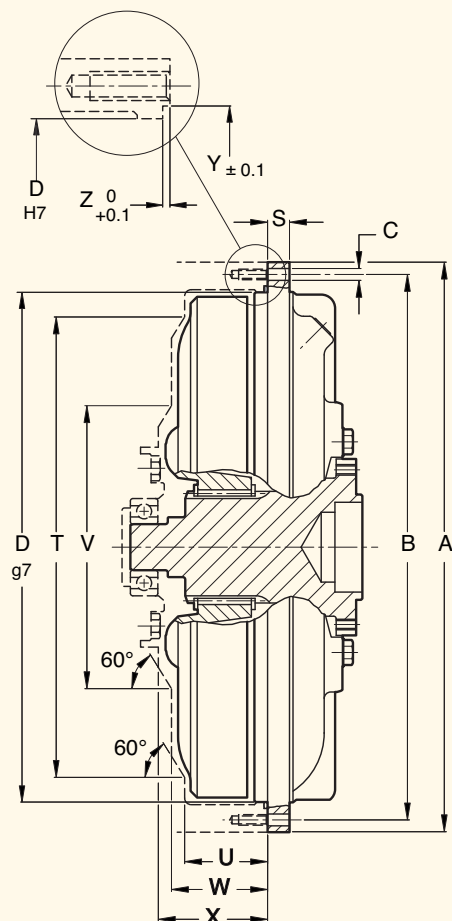

Dim. (mm)

Size	A	B	Nr.	C	D	S	T	U	V	W	X	Y	Z
				Ø									
9	295	280	12	9	253	13	222	42	142	47	52,5	261	2.2
11	325	311	12	9	284	13	252	47	164	52.5	59.5	292	2.2
12	370	356	20	9	328	13	290	53	177	59	64	338	3
13	398	384	20	9	356	15	320	56	198	64	69	364	2.8
15	460	440	24	11	406	17	365	63	230	73	83	418	4.3
17	520	500	24	11	465	18	420	70	240	82	85	477	4.3

DIMENSIONS CAN BE CHANGED WITHOUT NOTICE

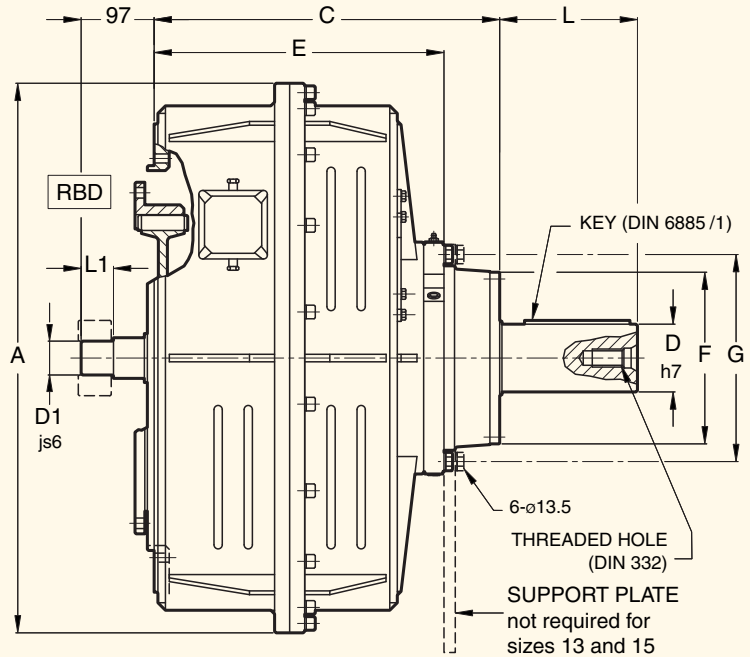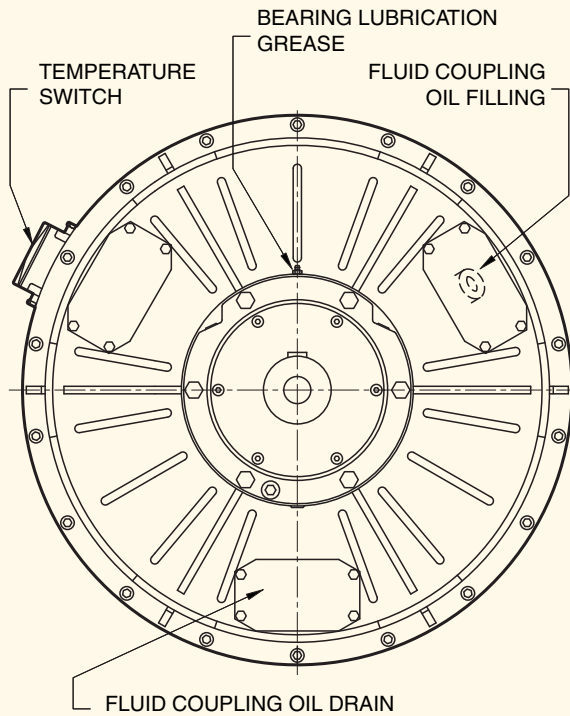


Dim. (mm)

Size	A	C	D	D1	E	F	G	H	H	L	L1	SAE flywheel size	SAE housing size	weight (kg) <sup>(1)</sup>	OIL (lt) max
								nr	Ø						
13	451	231.3	57.15	30	-	-	-	-	-	139.7	33	11 <sup>1/2</sup>	3	62	5.2
15	545	290	63.5	30	-	-	-	-	-	165.1	33	11 <sup>1/2</sup>	3	85	7.65
17	662	389	85	30-35	304.5	190.5	225.5	6	13.5	170	38	11 <sup>1/2</sup> -14	3-2-1	176	11.7
19	662	389	85	30-35	304.5	190.5	225.5	6	13.5	170	38	11 <sup>1/2</sup> -14	3-2-1	185	14.2
21	730	462	90	45	385	245	275	6	15	180	43	14	1	313	19
24	820	462	90	45	385	245	275	6	15	180	43	14	1-0	355	28.4

FOR 13 KFBD: KEY ACCORDING TO USAS SQUARE B17.1.67; SHAFT THREADED HOLE 5/8" 11-UNC  
 FOR 15 KFBD: KEY ACCORDING TO USAS SQUARE B17.1.67; SHAFT THREADED HOLE 3/4" - 10-UNC.  
 FOR 17-19-21-24 KFBD: KEY ACCORDING TO DIN 6885; SHAFT THREADED HOLE DIN 332

(1) WEIGHT REFERS TO KFBD LARGER FLYWHEEL SIZE AND WITHOUT OIL  
 TEMPERATURE SWITCH IS AVAILABLE AS OPTIONAL. IT DETECTS THE SURROUNDING AIR TEMPERATURE RELATED TO THE FLUID COUPLING OIL TEMPERATURE. IT IS ADJUSTABLE ACCORDING TO AMBIENT TEMPERATURE (REFER TO TF5941-O).

DIMENSIONS CAN BE CHANGED WITHOUT NOTICE

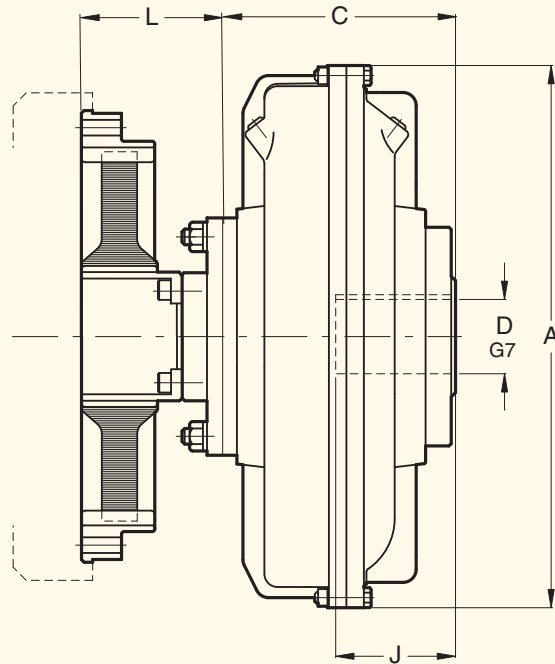

Dim. (mm)

Size	D max	J max	A	C	L	SAE flywheel size	SAE housing size	weight (kg)(1)	OIL (lt) max
15	65	140	460	205	123	11 <sup>1/2</sup> -14	3-2-1	63	7.65
17	80	170	520	223	113	11 <sup>1/2</sup> -14	2-1	81	11.7
19			565			11 <sup>1/2</sup> -14	2-1	88	14.2
21	90-□100	170-210	620	260-295	109±5	14-16	1-0	114	19
24			710		125±6	14-16	1-0	139	28.4
27	120	210	780	297	128±6	14-16-18	-	208	42
29	135	240	860	326		14-16-18	-	261	55
34	150	265	1000	412	103±5	18-21	-	403	82.5

STANDARD KEYWAY AS PER DIN 6885/1

□ REDUCED DEPTH KEYWAY AS PER DIN 6885/2

(1) WEIGHT REFERS TO KRDA LARGER FLYWHEEL SIZE AND WITHOUT OIL

DIMENSIONS CAN BE CHANGED WITHOUT NOTICE

PRODUCT	POWER RANGE KW	TYPE	IN LINE	SIDE LOAD	TYPICAL APPLICATIONS
SKFC -SKFU	15 - 260	F	•		farm and airport tractor,  lift truck, dumper, loader,  road roller, concrete mixer,  fire truck, snow vehicle,  road sweeping machine,  centrifugal pump, gear pump  vane pump, reciprocating  pump, centrifugal and  volumetric compressor,  fan, blower, chiller,  wood chipper, stone crusher,  shredder, grinder, mill,  dredge pump, marine  propeller, bow thruster,  water jet, generating set  drilling machine
SKFE		F	•	•	
KRBD - KRDA	15 - 1300	E+F	•		
KRU		F	•		
KFBD	45 - 600	E+F	•	•	
HFR	50 - 1300	C dis	•	•	
HFR + KR or KSD		C dis	•	•	
HFO		C dis		•	
HFO+KSD	50 - 700	C dis		•	
RBD	30 - 1000	E	•		
PF RBD	80 - 700	E	•	•	
KPTO	65 - 1000	E+F dis	•	•	
KPTB	65 - 1700	E+F dis	•	•	
KSL	220 - 4000	E+F dis	•		
MPD - SPD	27 - 1300	E+G	•	•	
REVERMATIC	40 - 60	P	1forw - 1rev		
RANGERMATIC	40 - 55	P	3forw - 1rev 2forw - 2rev 2forw - 1rev		

F	Fluid coupling	G	Gear drive
C	Clutch	P	Powershift trasmission
E	Elastic coupling	dis	Disconnectable

## EUROPE

### AUSTRIA

ASC GMBH  
4470 Enns

### AUSTRIA (Diesel appl.)

ESCO ANTRIEBSTECHNIK GMBH  
53831 Troisdorf

### BELGIUM

ESCOPOWER N.V.  
1831 Diegem

### CZECK REPUBLIC

TESPO ENGINEERING s.r.o.  
602 00 Brno

### CZECK REPUBLIC (Diesel appl.)

ESCO ANTRIEBSTECHNIK GMBH  
53831 Troisdorf

### DENMARK

JENS S. TRANSMISSIONER A/S  
DK 2635 ISHØJ

### DENMARK (Diesel appl.)

TRANSFLUID s.r.l.  
21013 Gallarate (VA)

### ENGLAND & IRELAND

MARINE AND INDUSTRIAL TRANS. LTD.  
Queenborough Kent me11 5ee

### FINLAND

OY JENS S. AB  
02271 Espoo

### FRANCE

▲ TRANSFLUID FRANCE s.a.r.l.  
38500 Voiron  
Tel.: +33.9.75635310  
Fax: +33.4.26007959  
tffrance@transfluid.it

### GERMANY

ESCO ANTRIEBSTECHNIK GMBH  
53831 Troisdorf

### HOLLAND

AANDRIJF TECHNISCH BURO BV  
5902 RB Venlo

### HOLLAND (Diesel appl.)

ESCO AANDRIJVINGEN B.V.  
2404 HM Alphen a/d Rijn

### HUNGARY

AGISYS  
2045 Torokbalint

### NORWAY

TRANSFLUID s.r.l.  
21013 Gallarate (VA)

### POLAND

SENOMA LTD  
PL40-153 Katowice

### PORTUGAL

REDVARIO LDA  
2735-469 Cacem

## RUSSIAN FEDERATION

▲ TRANSFLUID  
Moscow Representative Office  
Moscow  
tfrussia@transfluid.it

## SLOVAKIA

ESCO ANTRIEBSTECHNIK GMBH  
53831 Troisdorf

## SLOVENIJA

NOVI STROJI  
3210 Slovenske Konjice

## SPAIN

TECNOTRANS BONFIGLIOLI S.A.  
08040 Barcelona

## SWEDEN

JENS S. TRANSMISSIONER AB  
SE-601-19 Norrköping

## SWEDEN (Diesel appl.)

TRANS-AUTO  
SE 151-48 Sodertälj

## SWITZERLAND

TRANSFLUID s.r.l.  
21013 Gallarate (VA)

## TURKEY

REMAS  
81700 Tuzla Istanbul

## OCEANIA

### AUSTRALIA

CBC POWER TRANSMISSION  
Kingsgrove NSW 2208

### NEW ZEALAND

TRANSFLUID s.r.l.  
21013 Gallarate (VA)

## AMERICA

### ARGENTINA

ACOTEC S.A.  
Villa Adelina - Buenos Aires

### BRAZIL

WAD  
05014-060 Sao Paulo SP

### CHILE

SCEM LTDA  
Santiago Do Chile

### COLUMBIA

A.G.P. REPRESENTACIONES LTDA  
77158 Bogotá

### MEXICO

A.A.R.I., S.A. de C.V.  
11500 Mexico df

### PERU'

DEALER S.A.C.  
Cercado, Arequipa

### U.S.A.

KRAFT POWER CORP.  
Suwanee GA 30024

### U.S.A. & CANADA & MEXICO

▲ TRANSFLUID LLC  
Auburn, GA30011  
Tel.: +1.770.8221777  
Fax: +1.770.8221774  
tfusa@transfluid.it

## AFRICA

### ALGERIA - CAMEROUN - GUINEA - MAROCCO - MAURITANIA - SENEGAL - TUNISIA

TRANSFLUID FRANCE s.a.r.l.  
38500 Voiron (France)  
Tel.: +33.9.75635310  
Fax: +33.4.26007959  
tffrance@transfluid.it

### EGYPT

INTERN.FOR TRADING & AGENCY (ITACO)  
Nasr City (Cairo)

### SOUTH AFRICA-SUB SAHARAN COUNTRIES

BMG BEARING MAN GROUP  
Johannesburg

## ASIA

### ASIA South East

ATRAN TRANSMISSION PTE LTD  
Singapore 608 579

### CHINA

▲ TRANSFLUID BEIJING TRADE CO. LTD  
Beijing  
Tel.: 0086.10.62385128-9  
Fax: 0086.10.62059138  
tbtcfino@sina.com

### INDIA

PROTOS ENGINEERING CO. PRIVATE LTD  
600002 Tamilnadu Chennai

### INDONESIA

PT. HIMALAYA EVEREST JAYA  
Barat Jakarta 11710

### IRAN

LEBON CO.  
Tehran 15166

### ISRAEL

ELRAM ENGINEERING &  
ADVANCED TECHNOLOGIES 1992 LTD  
Emek Hefer 38800

### JAPAN

ASAHI SEIKO CO. LTD.  
Osaka 593

### KOREA

NARA CORPORATION  
Pusan - South Korea

### TAIWAN

FAIR POWER TECHNOLOGIES CO.LTD  
105 Taipei

### THAILAND

SYSTEM CORP. LTD.  
Bangkok 10140

### UAE - SAUDI ARABIA - KUWAIT - OMAN

BAHRAIN - YEMEN - QATAR  
NICO INTERNATIONAL U.A.E.  
Dubai

LOCAL DISTRIBUTOR

▲ TRANSFLUID SUBSIDIARIES